



**2017
SPL
RULEBOOK**

2016 USACI SPL RULES

This section of the USACI rulebook was written by the USACI Rules & Ethics committee in order to retain the basic ideas that have always made auto sound competition fun and fair. Each year, USACI forms a committee of members to gain input from its competitors, the goal being to make the contests fair, fun and challenging. This rule Book and any subsequent refinements are the result of those meetings. It is USACI's sincerest hope that these rules will be received as an example of the organizations continuing efforts to promote the competitor's responsibility to know and adhere to the rules contained herein.

USACI reserves the right to make written amendments to this rule Book without prior written notification to its members. USACI will however, make every effort to notify active members via the Internet and/or by distributing any written changes during the registration process of a sanctioned USACI contest. All competitors and enthusiasts are encouraged to visit our web site at www.usaciworldwide.org for rules updates, event schedules and event results.

The rules set forth in this section of the rule Book shall be used by the USACI official(s) and/or judging staff at all USACI Sanctioned events. It is the responsibility of event officials and staff to adhere to these rules to the best of their ability. In consideration of that, each competitor should read this manual and have a thorough understanding of its contents when designing or improving a competition mobile audio system. Ultimately, it is the competitors' responsibility to know and abide by the USACI rules.

Best regards,

USACI

(c) Copyright 1986 - 2016 United States Autosound Competition International, Inc.

All rights reserved. No part of this publication may be reproduced, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of United States Autosound Competition International, Inc.

Exceptions to this Book:

The USACI rulebook is published as a guideline for conducting USACI sanctioned SPL events. The head judge at any event may supersede portions of this rulebook at any time for the following reasons:

1. To avoid violating local law or ordinance.
2. To protect the safety of spectators, judges, competitors, etc.
3. To protect judging meters and equipment.
4. To maintain the integrity of the event and judging.
5. To comply with time constraints as they may be imposed.

2017 REVISIONS COLOR

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
STREET BEAT DIVISION										
STREET BEAT 1	UNLIMITED	NONE	4	NO	1+STOCK	15.5V	NO	255 SQ. IN. MAX	30 SEC. MUSIC AVERAGE	STOCK
STREET BEAT 2	UNLIMITED	BEHIND B PILLAR	7	YES	1+STOCK	15.5V	NO	525 SQ. IN. MAX	30 SEC. MUSIC AVERAGE	MODIFIED
STREET BEAT 3	UNLIMITED	BEHIND B PILLAR	UNLIMITED	YES	UNLIMITED	18V	NO	775 SQ. IN. MAX	30 SEC. MUSIC AVERAGE	MODIFIED
STREET BEAT 4	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	30 SEC. MUSIC AVERAGE	XTREME
NOVICE DIVISION										
NOVICE 0-1500	1 AMPLIFIER	NONE	UNLIMITED	NO	1+STOCK	15.5V	NO	UNLIMITED	TONE	STOCK
NOVICE 1500-3000	2 AMPLIFIERS	BEHIND B PILLAR 12" BELOW ROOF	UNLIMITED	NO	1+STOCK	15.5V	NO	UNLIMITED	TONE	NO WALL
NOVICE 3000-6000	2 AMPLIFIERS	BEHIND B-PILLAR	UNLIMITED	NO	UNLIMITED	15.5V	NO	UNLIMITED	TONE	MODIFIED
CLAMPED DIVISION										
STOCK 2K	1 AMPLIFIER	NONE	UNLIMITED	YES	UNLIMITED	15.5V	2K	UNLIMITED	TONE	STOCK
TRUNK 2K	1 AMPLIFIER	TRUNK ONLY	UNLIMITED	YES	UNLIMITED	15.5V	2K	UNLIMITED	TONE	TRUNK
NO WALL 4K	2 AMPLIFIERS (STRAPPED)	BEHIND B PILLAR 12" BELOW ROOF	UNLIMITED	YES	UNLIMITED	18V	4K	UNLIMITED	TONE	NO WALL
MODIFIED 8K	2 AMPLIFIERS (STRAPPED)	BEHIND B PILLAR	UNLIMITED	YES	UNLIMITED	18V	8K	UNLIMITED	TONE	MODIFIED
STOCK DIVISION										
STOCK 0-3000	1-AMPLIFIER	NONE	4	YES	1+STOCK	15.5V	NO	UNLIMITED	TONE	STOCK
STOCK 3000-6000	2 AMPLIFIERS	NONE	7	YES	1+STOCK	15.5V	NO	UNLIMITED	TONE	STOCK
STOCK UNLIMITED	UNLIMITED	NONE	UNLIMITED	YES	UNLIMITED	15.5V	NO	UNLIMITED	TONE	STOCK
NO WALL DIVISION										
NO WALL 0-3500	1 AMPLIFIER	BEHIND B PILLAR 12' BELOW ROOF	5	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	NO WALL
NO WALL 3500-7000	2 AMPLIFIERS	BEHIND B PILLAR 12" BELOW ROOF	7	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	NO WALL
NO WALL UNLIMITED	UNLIMITED	BEHIND B PILLAR 12" BELOW ROOF	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	NO WALL
TRUNK DIVISION										
TRUNK UNLIMITED	UNLIMITED	TRUNK ONLY	UNLIMITED	YES	UNLIMITED	15.5V	NO	UNLIMITED	TONE	TRUNK
MODIFIED DIVISION										
MODIFIED 0-7000	2 AMPLIFIERS	BEHIND B PILLAR	7	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	MODIFIED
MODIFIED 7000-14000	4 AMPLIFIERS	BEHIND B PILLAR	13	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	MODIFIED
MODIFIED UNLIMITED	UNLIMITED	BEHIND B PILLAR	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	MODIFIED
XTREME DIVISION										
XTREME	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	XTREME
PORT WARS DIVISION										
PORT WARS	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	PORT WARS
BASS BATTLES DIVISION										
NO WALL	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	UNLIMITED	NO	UNLIMITED	1 MIN. MUSIC AVERAGE	XTREME
WALL	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	UNLIMITED	NO	UNLIMITED	1 MIN. MUSIC AVERAGE	XTREME

USACI CODE OF CONDUCT

By entering an event, purchasing a membership or being a member of any USACI affiliated online group including, (but not limited to) any social media outlet, you automatically agree to these terms and conditions of the USACI Code of Conduct:

1. All USACI competitors will be required to conduct themselves in a professional manner at all times at events or any online interactions affiliated with USACI.
2. Always be respectful to USACI officials and fellow competitors.
3. Always be respectful to any Sponsors, retailers and promoters affiliated with USACI.
4. Always do your best to operate your vehicle and sound system in a safe respectful manner.
5. Always do your best to represent USACI in a positive fashion.

EVENTS:

Any issues that may arise at an event should be brought to the attention of the head judge and resolved that day. If for any reason you feel the judge's ruling is unfair you may email usaciworldwide@gmail.com for further resolution. If you have a question regarding rules, please email usacirules@gmail.com

Any person(s) found to be threatening or abusive, whether verbally or physically toward any USACI judge or competitor will be removed from the event. In such instances the punishment can include up to banning the said person(s) for life from all USACI events. This will be determined by the rules and ethics committee on a per case basis.

ONLINE:

Any questions or concerns about issues at events should be handled through email, any negative online posts pertaining to issues at events will not be tolerated.

Any vulgar, threatening, abusive or derogatory online posts on any site (including social media) affiliated USACI will not be tolerated.

The punishment for any of these actions will be:

1st Offense = 30 day probation period and 30 day suspension of all online interactions

2nd Offense = 90 day suspension from all events and online interactions.

3rd Offense = 1 year suspension from all events and online interactions.

USACI WORLD RECORD RULES

All rules of the class being run will apply. Refer to the rules and matrix for the division and class in which you are attempting a record for those individual rules and limitations.

World Records may only be attempted at WORLD RECORD events. IF World Record attempts are allowed the event schedule will denote that with the "WR" in the events category. All World Record event fees must be paid prior to event and all World Records recorded at the event must be submitted in writing along with the competitors name and membership ID number (membership must be current), and individual world record fee's to the USACI office within 72 hours of event completion. Once World Records are verified they will be posted and the competitor mailed and award plaque with his/her name, class, new record, and date set.

All vehicles must make two runs and both runs must exceed the prior record in order for a new record to be recognized. Of these two runs only the LOWEST reading of the two shall be recognized as the new record

After a record has been achieved the judge will inspect the vehicle. The engine compartment, interior compartment, trunk or hatch compartment, and undercarriage of the vehicle will be inspected to make sure all the requirements of the class in which the record attempt is being done are fulfilled and that there are no modifications that disqualify the run. Only after this verification may a World Record be announced.

If a competitor is disqualified on a world record attempt, all previous SPL runs at the event in that class will be given a zero score. Any additional classes the competitor may have ran will be subject to a zero score if the infraction applies to more than one division or class.

If more than one competitor sets a record in the same class on the same day or at the same event, only the higher record will be acknowledged.

"LEGAL" records will be recorded on the windshield 12" from the passenger "A" pillar, 4" above the dash, and 1" off the glass. A USACI microphone jig or tape measure may be used to determine this location. The microphone will adhere to the windshield using the factory suction cups provided. Vehicle must be closed and sealed. Competitor may be in the vehicle but must sit on the opposite side of the microphone and must wear hearing protection at all times. Competitor refers to registered owner or other persons as designated by registered owner. Podiums will be allowed in all classes.

In all **Legal (Dash)** record attempts the vehicle may not be running. The record reading will be taken with the engine off over a 30 second period. If the first attempt is successful at breaking the record then the vehicle will be left unchanged and without any work or modifications for up to five minutes. The second run may be attempted in less than five minutes but may not exceed five minutes. Once the second run is complete and the record has been surpassed by both runs the vehicle will be opened for inspection by the judge. Once the vehicle has been inspected and verified for the class a record may be announced.

"OUTLAW" records may be recorded anywhere forward of the "B" pillar. The microphone must be secured in a USACI certified globe and be placed where it can be observed by the world record official during the entire run. Doors may be open or closed but may not be opened and then closed during the run. Competitor may be in the vehicle but must sit on the opposite side of the microphone and must wear hearing protection at all times. Competitor refers to registered owner or other persons as designated by owner. Podiums will be allowed in all classes.

In all **Outlaw SPL** record attempts the vehicle may be started 30 seconds prior to the record run. Idle must be set no more than **2000 rpm**. The vehicle can run until the reading is completed and then must be shut off. If a record is achieved on the first run then the engine must remain off and the vehicle may not be worked on or modified for a period of up to 5 minutes. You may elect to do the second run earlier but no later than 5 minutes after the conclusion of the first run. At this point the vehicle engine may be re started following previous guidelines until completion of the second run. If the world record attempt is successful then the vehicle engine will be turned off and the vehicle opened to the judge for final inspection prior to record being recognized.

USACI SPL GUIDELINES

DIVISIONS:

Outlaw SPL divisions are based on the configuration of the system and vehicle. Specific guidelines for each division will be discussed in their respective sections of this book.

AMPLIFIERS DEFINED:

One amplifier is considered one power supply, one system board, driving 1 or 2 channels. A 3-4-channel amp would be considered two amplifiers. A 5-6-channel amp would be considered three amps and so on.

A car audio system's total wattage shall be determined by the highest manufacturer published RMS power rating @ 14.4 volts or lower. If an amplifier does not have a rating at 14.4v or lower rating then the next highest published rating will be used. If any amplifiers rating cannot be determined, that amplifier will be moved to the highest power class in that division until a power rating can be determined. USACI reserves the right to independently test any amplifier to determine the true RMS power rating and reclassify that amplifier as needed.

BATTERY AND SUPER/ULTRA CAPACITOR LIMITATIONS:

A 12 volt battery is defined as a battery that has a nominal terminal voltage of 12-Volts, consists of 6 internal series-connected cells. A 16 volt battery is defined as a battery that has a nominal terminal voltage of 16-Volts, consists of 8 internal series-connected cells. A 12 volt battery with 7 to 12 cells would be two batteries, and so on. A battery shall have no more than two "unique" battery terminals connected to the system, one being positive and the other being negative.

The physical size of each battery is limited to 800 cubic inches (13110 cubic cm) or less. (Height x Length x Width. Excluding the battery terminals.) The physical shape of the battery is irrelevant. Batteries that exceed these 800 cubic inches or exceed allowed number of cells will be considered multiple batteries. (Example: 801-1600 cubic inches is two batteries).

Lithium batteries will be counted as such:

Lithium batteries will be counted toward the overall battery limit for any class by physical size. The physical shape of the battery is irrelevant.

0-400 cubic inches = 3 batteries

401-600 cubic inches = 4 Batteries

600-800 cubic inches= 5 Batteries

800+ cubic inches = 6 Batteries

Super/Ultra capacitors will be counted as such:

A "bank" of Super/Ultra capacitors will be defined as 6 or 7 cells wired in series. Any "bank" of capacitors with 8 to 14 cells will be counted as 2 banks and so on. Whether the cells are bussed together or in a manufacture casing it will be considered a "bank". A bank of capacitors will be counted as one battery toward the total battery limit for any class. You may use a mix of batteries and banks of capacitors as long as the battery limit for the class is not exceeded with any combination of both. (Example: Stock +6 you will be allowed 6 batteries + the stock location battery OR 6 banks of capacitors + the stock location battery OR 3 batteries, 3 banks of capacitors + the stock location battery.)

These limitations apply to all classes with defined battery limits. Any class and/or division that allows unlimited batteries will not be bound by this definition. "Stock" battery may be relocated and/or used to power the audio system. (1 + Stock = 2 batteries total in the vehicle).

PROPER POWER CLASS:

Power classes in each division are determined by the systems amplifier(s) highest manufacturer published RMS power rating @ 14.4 volts or lower.

A competitor may not compete in a lower power class other than the one that his/her total system power dictates. The exception to this would be the unlimited or "OPEN" power class

Any and all amplifiers powering the subwoofers within the vehicle under test will be included in the system's total power. This sum will not include the power, if any, of the systems (radio, CD player, mid-range/highs amplifier(s) unless it is actively driving a subwoofer or a group of subwoofers. Spare or unused amplifiers may be left in the vehicle provided the event director has the ability to definitively determine the amplifier is not in use.

Competitors whose systems include amplifiers that are not manufacturer rated, are modified internally, or not commercially available will be required to compete in the unlimited power class of their respective division.

POWER SOURCE:

All audio equipment must derive its power from the vehicle power source. No external power sources (battery chargers, etc.) will be allowed. In the case of a podium, power must be drawn from the vehicle power source.

USACI OUTLAW SPL JUDGES:

Outlaw SPL judges shall be appointed by the head judge or the event sponsors and are subject to approval by USACI. A USACI Outlaw SPL judge shall not be allowed to judge any vehicle being entered by an immediate family member, employee, employer or substantial customer. The head judge may appoint an alternate to judge that vehicle. It is within the head judge's or other USACI Outlaw SPL official's authority to decide the application of this rule to any disputes.

JUDGING ORDER:

The head judge will determine if there is a specific judging order. Judging will end when all vehicles have been judged. No score or refund will be given to a competitor who fails to have their vehicle in the judging line before the judging has ended.

"5 MINUTE RULE"

Any competitor who allows or causes more than a 5-minute "gap" between cars at the judging station may have their score disqualified and have to make a rerun, at the discretion of the event director.

USACI reserves the right to run an event using either an in-place or specific order judging routine. At any event it is the responsibility of the event coordinator or head judge to inform the competitors involved of the details of that day's judging format.

MULTIPLE JUDGING LINES:

Some events may form two or more judging lines in order to expedite the judging process. In such cases all competitors in a particular power class and division will be judged in the same line and on the same test equipment. It is the responsibility of the competitor to confirm which lane his or her power class and division is to be judged in.

DRIVING THE VEHICLE THROUGH:

Judging shall be conducted with each competitor's vehicle being driven through a judging line in an orderly fashion and under its own power. The vehicle must be capable of entering and exiting the judging area under its own power. Vehicle malfunctions may be an exception to this rule and will be evaluated by the head judge on an individual basis.

SYSTEM OR VEHICLE MALFUNCTIONS:

An equipment or vehicle malfunction is the competitor's responsibility. Once the vehicle is in position to be judged, the competitor shall be allowed a maximum of five minutes to correct or repair any malfunction. After the allotted time has expired, the vehicle must be judged if possible or given a score of zero. No repairs will be allowed after SPL testing has started. No refunds will be given.

RERUNS:

At most events competitors will be allowed to register and rerun their vehicle to improve their score or standing. If a competitor chooses to rerun his or her vehicle, the sound system must be made up of the same size speakers, the same number of speakers, and the same number of amplifiers as was in the vehicle on its first SPL attempt. A change in brand or power rating is acceptable provided the new equipment does not change the power class or division of the vehicle. There will be an additional fee for all reruns. All competitors must have an operational system in their vehicle at the time of registration. This system must be the system the competitor competes with at the event. Competitors may change equipment in case of malfunction, but entire system and enclosure may not be swapped.

Intent: The intent of this rule is to prevent competitors from sharing the same audio system in more than one vehicle. The head judge at the event shall interpret this rule and such decision may only be appealed to the USACI rules and ethics committee.

IN CASE OF A TIE:

In the rare event that two or more competitors in the same power class and division receive the same final score, the winner will be determined by a tie breaker. If after one tiebreaker the score is still the same, the second tie breaker will be determined by hundredths of a decibel.

DISRUPTING AN EVENT:

The head judge or event director reserves the right to deduct points or ask any competitor to leave an event if the competitor's behavior becomes disruptive during the course of the event. If a disruptive competitor is asked to leave, the competitor will not receive a refund. Any points or awards the competitor might have earned at that event will be forfeited. Competitors will be responsible for the actions of their guests at the event.

If the cause of the inappropriate behavior is believed to be alcohol or any other controlled substance, USACI has the right to ban the competitor from competing in any sanctioned USACI events for a minimum of one year.

To help assure that every USACI event is conducted in a safe environment, no weapons in the possession of a competitor or anyone accompanying a competitor will be tolerated. If the competitor does not comply with this demand, he or she will be disqualified, asked to leave the event site or be escorted from the site by the local authorities. Any threats towards anyone involving a weapon, however casual, will be cause for banning the competitor from ever again competing in any USACI sanctioned event. No refunds will be given for being disqualified.

APPEALING A DECISION:

If a competitor questions his or her score or the possible error in the judging process by which that score was achieved, the competitor may seek explanation by the judge or head judge of the event. The decision of the head judge will be considered final at that event. After the event a competitor may petition the USACI Rules & Ethics committee to reconsider either a rule or a head judge's decision. Neither USACI nor an event sponsor assumes responsibility for any awards previously given another competitor, even if in error.

PROTESTS:

If a competitor has made a plausible complaint, involving any unfair or illegal item which may be hidden in another competitor's vehicle in the same power class and division, and would require disassembly of that vehicle or audio system to verify its existence, then the complaint must be accompanied by a cash security deposit. (**No checks**) Such complaints may only be made after the vehicle in question has been judged at that event and before any prizes are awarded. The security deposit required to file a protest at a Single or Double Point event would be \$250. Regional, Triple points, and finals events will be \$500.

The Head Judge must have the security deposit in hand before any action may be taken. The Head Judge would then appoint two qualified persons to disassemble the vehicle for inspection. The competitor whose vehicle is in question may elect not to have their vehicle inspected by disqualifying themselves from the event with no refund. If, in the Head Judge's opinion, the vehicle in question is found to be inconsistent with this rule book, the cash security deposit will be returned to the competitor making the complaint and the competitor in question may be disqualified from that event and all future USACI events for a period of up to two years. If an inconsistency is ruled to be unintentional, then the competitor in question may only be disqualified from that event. If in the Head Judge's opinion, no inconsistency is found in the vehicle in question, then the cash security deposit, less 20% USACI protest fee, will be awarded to the competitor whose vehicle was inspected and it will be the responsibility of the competitor who was protested to reassemble the vehicle or audio system.

A USACI member may protest the output of any brand and model of amplifier. The protest procedure will entail the member sending a letter of protest to the USACI office containing the make and model of the amplifier to be protested. A \$300 nonrefundable protest fee must accompany this request. USACI will acquire the amplifier and test the amplifiers at the USACI offices in order ascertain if the amplifier's actual output falls within the published output specified by the manufacturer. If this amplifier is found to produce 126% or more of its rated power, that amplifier will be rerated for competition use. The USACI rating standard is 14.4 volts at the MAX RMS power rating non-inductive load measured at 1% THD.

SOUND PRESSURE LEVEL TESTING:

The occupant of the vehicle under test shall have proper hearing protection if remaining in the vehicle for testing. Refusal to wear properly placed hearing protection or removal of it during the test shall be cause for immediate disqualification from the event and no score or refund will be given. Only the registered owner of the vehicle or his/her attorney-in-fact may be inside the vehicle during SPL testing. **Only the competitor operating the sound system will be allowed to sit in the vehicle during testing.**

The SPL microphone/sensor may not be placed on the same side of the vehicle as the competitor. Competitor must remain in the front of vehicle (forward of "B" post) during testing.

An audio system's Sound Pressure Level will be measured using an approved sound pressure level meter. This test must be measured on the current version of the USACI Outlaw SPL competition software, unless stated otherwise in a specific division. A cd, usb, ipod etc. may be used as long as the judge can verify the software's authenticity. The director of the USACI event will provide this in case the competitor does not have their own.

The SPL judge will be responsible for making sure the SPL meter is set up and functioning correctly. The competitor must have the vehicle ready to test prior to entering the judging lane. The vehicle's emergency brake must be set during testing. After the SPL microphone/sensor has been placed, the software loaded, hearing protection properly placed over the occupant's ears and the system readied, the competitor should signal the judge that he or she is ready for the test.

Once the test begins, the competitor has thirty seconds to try and achieve the highest score possible. The music, tone or sweep may be restarted and/or the tracks can be changed as often as possible within the thirty-second time window. The competitor may choose to stop the SPL testing at any time before the end of the thirty-second time limit but the judge must be able to verify that the correct software is being used during testing. The use of tone generators, doublers or any other device that externally (outside of the closed signal chain) generates or alters the frequencies that the system is playing during SPL testing is expressly prohibited and will result in disqualification with no refund. Any tampering with the microphone/sensor or attempt to create a measurement by any means other than SPL produced by the audio system will be considered grounds for immediate disqualification and possibly being banned from future competition in any sanctioned events. The head USACI official present will investigate for any evidence of such tampering and the ruling of this official is final.

MICROPHONE/SENSOR PLACEMENT:

The microphone/sensor will be placed anywhere forward of the "B" pillar in the passenger compartment with a microphone/sensor globe attached in all SPL classes. Special panels or enclosures for globe placement will not be allowed. **No objects will be allowed to cover the globe, including but not limited to floor mats, carpet, towels etc. No objects will be allowed in the seat or floorboard on the same side as the microphone/sensor.** The microphone or sensor may not be placed anywhere that is deemed "hazardous to the equipment" by the head judge. The Microphone may be removed from the globe during testing only if it is to be placed in the "LEGAL" position on the windshield. Legal Position is 12 inches from passenger "A" pillar, 4 inches above the dash, attached to the windshield. Any construction or speaker placement that may manipulate the SPL meter may be considered reason to reclassify the vehicle. This decision will be at the discretion of the head judge.

RESPONSIBILITY OF COMPETITOR:

The competitor is responsible for his or her vehicle and audio system and any physical or mechanical damage resulting from their use or misuse of the vehicle and/or the audio system therein. It is the competitor's responsibility to know and abide by the rules contained in this book. If an amplifier rating cannot be determined by the head judge at any event it is the responsibility of the competitor to provide manufacturers literature or other paperwork to verify the power rating of the amplifiers in question.

DEFINING THE TERM "COMPETITOR":

The term "competitor" applies to the vehicle's owner, an employee of its owner, an immediate family member, or a person bearing a power of attorney for the vehicle's owner. If a competitor is unable to attend an event, he or she may designate someone to drive the vehicle through the judging line. The designated person will be considered a competitor and will assume all responsibilities of such. A "competitor" may not run any vehicle under his name or membership number unless said vehicle is legally registered to the competitor in his state of residence prior to the event date. (A bill of sale will not fulfill the requirement for this rule). **One vehicle will only be allowed to compete under one unique competitor name per event. One vehicle may not be shared by more than one competitor.**

EVENT REGISTRATION:

Event registration will generally begin approximately one hour prior to the stated beginning time of the contest. After the contest has begun, the event director, at his or her discretion may accept late registrations and opt to add a surcharge to the stated event registration fee for late registrants if he or she so desires.

Each vehicle can be entered and judged in only one power class but in as many divisions as it may qualify to compete in. A separate registration is required for each division's judging. A competitor may enter more than one vehicle in the same event but only in different power classes. Vehicles may reenter that same power class as many times as the event schedule will allow. (Retries)

All vehicles must be licensed, registered, insured and be "street legal" as per federal regulations to compete in the Stock, No Wall, or **Trunk** divisions (Or any class/division that uses these rules). Vehicles that do not comply will be reclassified to another division.

USACI will require all of the following OEM or equivalent equipment to be installed and fully functional at all times while being judged in the Stock, No Wall, **Trunk and Modified divisions:**

Headlights, Tail Lights, Speedometer, Emergency Brake, OEM or equivalent automotive seats, OEM Windshield.

VERIFICATION JUDGING CRITERIA:

The verification judge will verify the power ratings of each amplifier installed in the competitor's vehicle to ensure that the vehicle has been entered in the appropriate power class. It is the competitor's responsibility to prove the manufacturer's rated power of the amplifier if requested. Documents that are altered or not publicly available will not be accepted. The verification judge may install a voltage meter in any vehicle IN ANY DIVISION to monitor voltage during the run. While this is optional at single point events it will be MANDATORY at all multi point events. If a competitor's audio system does not, in the judge's opinion, meet all of the following basic requirements, the competitor may be disqualified from the event or be reclassified to the unlimited division. The vehicle and audio system must be fundamentally safe for the judging area. The audio system must consist of components that use some form of 12 VDC negative ground power supply. The vehicle and audio system must operate under its own power while being judged.

USACI POINTS SYSTEM

Single point event:	Double point event:	Triple point event:	Regional event:
1st = 8 points	1st = 16 points	1st = 24 points	1st = 32 points
2nd = 7 points	2nd = 14 points	2nd = 21 points	2nd = 28 points
3rd = 6 points	3rd = 12 points	3rd = 18 points	3rd = 24 points
4th = 5 points	4th = 10 points	4th = 15 points	4th = 20 points
5th = 4 points	5th = 8 points	5th = 12 points	5th = 16 points
6th = 3 points	6th = 6 points	6th = 9 points	6th = 12 points
7th = 2 points	7th = 4 points	7th = 6 points	7th = 8 points
8th+ = 1 point	8th+ = 2 points	8th+ = 3 points	8th+ = 4 points

Judges may receive event points for judging an event. The accrual of events points for judging shall be equal to a first place finish at that particular event. Event points accumulated by judging may be used to qualify for finals but will not apply toward any points champion awards. Judges opting to receive financial consideration for judging will not receive points for the same effort.

QUALIFYING FOR USACI WORLD FINALS:

USACI may award additional World Finals invitations.

In unique cases to be decided by the Rules and Ethics Board, USACI may issue "special invitations".

Competitors with two or less shows within a **200 mile** radius of their permanent residence will automatically be invited to World Finals. **Competitors attending World Finals under the mileage curve will only be allowed to compete in one class and will be subject to an extra \$100 fee.**

Competitors attending World Finals must have a current membership.

A competitor may only compete in one class per division, but may compete in multiple divisions at world finals if the competitor is qualified to do so.

TOTAL POINTS REQUIRED FOR USACI WORLD FINALS = 50

POINTS REQUIRED PER CLASS FOR USACI WORLD FINALS= 16

USACI SPL GENERAL RULES

THE GENERAL RULES APPLY TO ALL DIVISIONS AND CLASSES:

Podiums for head units will be allowed.

An unlimited amount of “automotive type” sound deadener is allowed.

The vehicle’s engine may be running during testing, but will be limited to **2000rpm**.

Batteries and Alternators may be upgraded, however the power source may not produce more than 15.5/18.0 volts with the vehicle running.

The OEM location battery may be relocated.

No modifications will be allowed to the interior of the passenger compartment, cargo area, or exterior of the vehicle in order to facilitate the audio system. The floor, ceiling, dashboard and interior panels must be OEM and in place.

All windows, doors and trunk or hatch openings must function properly and may not be permanently sealed.

No “tapes, resins, spay foams, sound deadeners” etc. should be used to seal vents, windows, interior panels or hold panels together in the interior passenger compartment of the vehicle. Other than the audio equipment and the allowed modifications for the Division the vehicle interior should appear to be “stock”. **All vehicles will be limited to one set of floor mats. The floor mats must remain flat on the floor in the OEM locations.**

Aftermarket seats may be installed provided they use the OEM or equivalent seat rails and retain the same functions as the OEM seats. If your vehicle came equipped with seats that slide and fold forward the replacement seats must do so as well. If the seats have removable headrests they must be installed. **Front seats must be bolted down in the OEM location.**

No subwoofers are allowed in front of the “B” pillar.

The enclosure, or any device(s) affixed to the enclosure may NOT protrude in front of the “B” pillars at any given point unless stated otherwise in the Division rules. (A string test may be performed if this rule is in question)

Any **equipment** being used for SPL (**batteries, amplifiers, subwoofers etc.**) must be located only in the designated “cargo” areas behind the “B” pillar. In passenger cars this would be either in the trunk or hatchback area.

No modifications will be allowed to the exterior of the vehicle and all portions of the system must remain inside the vehicle. Inside the vehicle is defined as inside of the factory bodylines, roof, and floorboard. Equipment in or on trailers, hitch racks, luggage racks and so on will not be permitted. No portion of the enclosure or audio system will be permitted to be located outside of the vehicle.

On vehicles with removable or convertible roofs, walls or panels, all equipment and all parts of the enclosure must remain inside the passenger area and may not protrude into or be located in an open air “bed” or other storage area not covered by the same roof that covers the passenger area.

Commercial type vehicles such as box trucks, panel trucks, 18 wheelers, etc. will only be allowed to compete in the Xtreme Division.

If a competitor SPL run(s) are disqualified due to a rule infraction, the competitor will receive a zero score. The competitor will be allowed to fix the issue and purchase a Rerun only if the infraction is deemed unintentional by the head judge.

Any competitor that is caught intentionally cheating will be banned from USACI. The length of the ban will be determined by the Rules & Ethics committee based on the severity of the infraction.

NOVICE DIVISION

The novice division is intended for the entry level competitor to compete on a national level.

Any competitor that has **won a 1st place championship** at a world finals in any organization will not be allowed to compete in the novice division. Any competitor that has ever worked in the 12v industry either on a retail level or a manufacturer level will not be allowed to compete in the novice division. The champion in each of the novice classes at USACI world finals must move up and will no longer be allowed to compete in this division after world finals. **Any competitor will be limited to a period of 2 years in the novice division.**

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
NOVICE DIVISION										
NOVICE 0-1500	1 AMPLIFIER	NONE	UNLIMITED	NO	1+STOCK	15.5V	NO	UNLIMITED	TONE	STOCK
NOVICE 1500-3000	2 AMPLIFIERS	BEHIND B PILLAR 12" BELOW ROOF	UNLIMITED	NO	1+STOCK	15.5V	NO	UNLIMITED	TONE	NO WALL
NOVICE 3000-6000	2 AMPLIFIERS	BEHIND B-PILLAR	UNLIMITED	NO	UNLIMITED	15.5V	NO	UNLIMITED	TONE	MODIFIED

CLAMPED DIVISION

In the clamped division you will be required to have the amplifier(s) and speakers wires easy to access and verify that the clamp meter is connected properly and no rules are violated.

The subwoofer amplifier(s) is limited to one set of speaker wires (a single + positive wire and a single – negative wire) out of the amp at least 1ft in length where the clamp and probes will be connected to ensure the power will read properly. After the 1ft of length out of the amplifier(s) you can split the speakers wires as many times as you like to the subwoofers.

The speaker wires should be a minimum of 12 gauge in size to properly probe the wires.

In classes that allow two amplifiers you will be required to have the amplifiers strapped and are limited to one set of speaker wires (a single + positive wire and a single – negative wire) out of the amps at least 1ft in length where the clamp and probes will be connected to ensure the power will read properly. After the 1ft of length out of the amplifier(s) you can split the speakers wires as many times as you like to the subwoofers.

It is the competitor's responsibility to possess the tools and skill to connect/disconnect the clamp meter. You will be required to clamp the positive speaker wire of the amplifier(s) as well as probe the positive + and negative- speaker and wires. USACI and its directors are only responsible for verifying the clamp and probes are connected correctly and setting the clamp meter up. USACI and its directors are not responsible for any damage to the vehicle or audio equipment due to improper installation of the clamp meter, the competitor assumes all responsibility of the clamp meter installation and removal.

(Any competitor caught cheating or attempting to cheat the clamp meter will be banned from all USACI events for a minimum of one year)

(Any Brazilian manufactured amplifiers will not be allowed in the clamped division until further notice.)

** USACI reserves the right to review and or remove any amplifier from competition for the clamped division if we feel it has an unfair advantage or the amplifier will not read properly on the clamp meter. **

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/ TONE	RULES
CLAMPED DIVISION										
STOCK 2K	1 AMPLIFIER	NONE	UNLIMITED	YES	UNLIMITED	15.5V	2K	UNLIMITED	TONE	STOCK
TRUNK 2K	1 AMPLIFIER	TRUNK ONLY	UNLIMITED	YES	UNLIMITED	15.5V	2K	UNLIMITED	TONE	TRUNK
NO WALL 4K	2 AMPLIFIERS (STRAPPED)	BEHIND B PILLAR 12" BELOW ROOF	UNLIMITED	YES	UNLIMITED	18V	4K	UNLIMITED	TONE	NO WALL
MODIFIED 8K	2 AMPLIFIERS (STRAPPED)	BEHIND B PILLAR	UNLIMITED	YES	UNLIMITED	18V	8K	UNLIMITED	TONE	MODIFIED

STOCK DIVISION

STOCK DIVISION uses the General rules with the following exceptions:

The power source may not produce more than 15.5 volts with the vehicle running.

The spare tire cover and cargo area carpet may be removed.

OEM interior panels may be carpeted or painted, but may not be modified in any way but with these exceptions:

Custom consoles will not be allowed in the Stock division. Door panel build outs to add midrange speakers are allowed as long as the OEM panels are used, **no more than 50% of the OEM panel may be modified**. The seats and doors must function properly. Custom door panels must house at least one set of midrange speakers. A maximum of one pair of 8" or a single 10" midrange speaker(s) plus the stock location will be allowed per door.

Enclosures in the cargo area of all vehicles competing in the Stock division must be installed behind the rear most passenger seats.

The enclosure, or any device(s) affixed to the enclosure may NOT block the view out of the rear glass. The enclosure or any device(s) affixed to the enclosure may NOT protrude above the bottom of the rear side window line. The rear side window line will be defined as the point where the interior panel, metal of the vehicle, or window seal ends (whichever applies) and the window glass begins on the interior of the vehicle. If the vehicle does not have rear side windows, (such as single cab trucks) the rear window of the vehicle will be used for the window line.

No portion of the enclosure or audio system will be permitted to be located outside of the vehicle this includes the bed of a pickup truck.

Rear passenger seats may be folded down during testing but may not be removed, nor may any part of the seat be removed. Rear seat backs may be unbolted and folded over for testing but may not be removed from the vehicle.

Amplifiers may be attached to the seat backs and folded down during testing. In such cases the seat must be able to return and lock into the factory position after testing.

Two seat hatchback vehicles competing in the stock division will be required to have all equipment located in the cargo area of the vehicle. Equipment behind the front seats and in "foot wells" is not permitted.

Trucks, vans, SUV's and cargo vehicles competing in the Stock division will be qualified as such:

In full size trucks originally equipped with forward facing rear seats, the cargo area will be defined as being under or behind the rear seat only. In mini trucks or trucks with side facing rear seats, the area behind the "B" pillars will be considered the cargo area. In both or either of these cases the enclosure, or any device(s) affixed to the enclosure may NOT protrude, forward of the "B" pillars.

Exception: In the case of a single cab pickup truck the box, speakers, and amplifiers may extend forward of the "b" post but must not extend further forward than the rear of the truck seat back. Seat back must be locked in place and the seat mounting may not be moved to facilitate system installation.

Bed cuts will not be allowed in Stock Division.

In vans and SUV's with OEM rear seats, the cargo area will be defined as the area behind **and under** the rear passenger seats. **Batteries and amplifiers will be allowed to be mounted under the rear seat. Any equipment must not protrude past the bottom of the rear seat when it is in the upright position. The rear seat must be able to fold down, lock in place in the upright position and retain all OEM functions.** If the vehicle came with a third row seat it may be folded down or removed if it is factory designed to do so.

Vans and SUV's that are originally manufactured without rear seats cannot compete in the Stock division.

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/ TONE	RULES
STOCK DIVISION										
STOCK 0-3000	1- AMPLIFIER	NONE	4	YES	1+STOCK	15.5V	NO	UNLIMITED	TONE	STOCK
STOCK 3000-6000	2 AMPLIFIERS	NONE	7	YES	1+STOCK	15.5V	NO	UNLIMITED	TONE	STOCK
STOCK UNLIMITED	UNLIMITED	NONE	UNLIMITED	YES	UNLIMITED	15.5V	NO	UNLIMITED	TONE	STOCK

TRUNK DIVISION

TRUNK DIVISION uses the General rules with the following exceptions:

The power source may not produce more than 15.5 volts with the vehicle running

Enclosures in the Trunk Division must be installed behind the rear most passenger seats. Neither the enclosure, nor any device(s) affixed to the enclosure may protrude above the factory rear deck. The rear deck may not be cut out or modified in any way. You may however remove the factory speakers normally located in the rear deck. Amplifiers must be located in the trunk area. Amplifiers may be attached to the seat back and lean forward with the seat back during testing but must not interfere with the seat being placed back into the factory position. Extra batteries may be located in the trunk but cannot be located inside the passenger compartment.

Vehicles without a "Trunk" will not be allowed in this division. "Hatchback" vehicle are not allowed.

Rear passenger seats may be folded down during testing but may not be removed. Rear seat backs may be unbolted and folded over for testing but may not be removed from the vehicle.

Amplifiers may be attached to the seat backs and folded down during testing. In such cases the seat must be able to return and lock into the factory position after testing.

Factory panels in the trunk area may be removed to facilitate the system.

OEM interior panels may be carpeted or painted, but may not be modified in any way but with these exceptions:

Custom consoles will not be allowed in the Trunk division. Door panel build outs to add midrange speakers are allowed as long as the OEM panels are used, **no more than 50% of the OEM panel may be modified**. The seats and doors must function properly. Custom door panels must house at least one set of midrange speakers. A maximum of one pair of 8" or a single 10" midrange speaker(s) plus the stock location will be allowed per door.

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
TRUNK DIVISION										
TRUNK UNLIMITED	UNLIMITED	TRUNK ONLY	UNLIMITED	YES	UNLIMITED	15.5V	NO	UNLIMITED	TONE	TRUNK

NO WALL DIVISION

NO WALL DIVISION uses the General rules with the following exceptions:

The power source may not produce more than 18.0 volts with the vehicle running.

Modifications will be allowed to the interior of the vehicle behind the "B" pillar and up to 12 inches from the roof of the vehicle at any point. Factory panels within 12" of the roof must remain intact.

The enclosure, or any device(s) affixed to the enclosure may NOT be within 12 inches of the roof of the vehicle at any point and may NOT be taller than 30 inches

OEM interior panels may be carpeted or painted, but may not be modified in any way but with these exceptions:

Custom consoles and door panels are allowed. Door panel build outs to add midrange speakers are allowed as long as the factory panels are used, **no more than 50% of the OEM panel may be modified**. The seats, windows and doors must function properly. Custom door panels must house at least one set of midrange speakers. Custom consoles **cannot be oversized for the vehicle** and must be used to accommodate the sound system. These modifications should serve a purpose in appearance and functionality. In other words the console and door panels cannot be built strictly for the intention of increasing SPL (this will be at the discretion of the head judge).

No modifications will be allowed to the exterior of the vehicle and all portions of the system must remain inside the vehicle. Inside the vehicle is defined as inside of the factory bodylines, roof, and floorboard. Equipment in or on trailers, hitch racks, luggage racks and so on will not be permitted. No portion of the enclosure or audio system will be permitted to be located outside of the vehicle.

Pickup trucks with the rear of the cab and/or front of the bed cut out in order to allow speaker or box placement (blowthrough) in the truck bed are allowed in this division. In these vehicles the floor of the truck bed may not be lowered or cut. Wheel wells must be OEM. Trucks may use the entire bed area for audio equipment.

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
NO WALL DIVISION										
NO WALL 0-3500	1 AMPLIFIER	BEHIND B PILLAR 12' BELOW ROOF	5	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	NO WALL
NO WALL 3500-7000	2 AMPLIFIERS	BEHIND B PILLAR 12" BELOW ROOF	7	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	NO WALL
NO WALL UNLIMITED	UNLIMITED	BEHIND B PILLAR 12" BELOW ROOF	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	NO WALL

MODIFIED DIVISION

MODIFIED DIVISION uses the General rules with the following exceptions:

The power source may not produce more than 18.0 volts with the vehicle running.

Modifications will be allowed to the interior of the vehicle behind the "B" pillar

OEM interior panels may be carpeted or painted, but may not be modified in any way but with these exceptions:

Custom consoles and door panels are allowed. Door panel build outs to add midrange speakers are allowed as long as the factory panels are used, **no more than 50% of the OEM panel may be modified**. The seats, windows and doors must function properly. Custom door panels must house at least one set of midrange speakers. Custom consoles **cannot be oversized for the vehicle** and must be used to accommodate the sound system. These modifications should serve a purpose in appearance and functionality. In other words the console and door panels cannot be built strictly for the intention of increasing SPL (this will be at the discretion of the head judge).

Automotive seats that are commercially available may replace driver and passenger's seats. Homemade, custom made, or seats designed for use in other than an automobile are not acceptable. The driver or passenger's seats may not be relocated from the factory mounting location. Aftermarket or custom seat brackets are allowed.

A maximum of two layers of OEM or equivalent DOT approved windshields will be allowed. The windshield(s) must be clear and have DOT etching. Materials such as Lexan, Plexiglas, polycarbonate, etc. will NOT be allowed. The windshield must use the factory mounting location and cannot protrude past the OEM mounting location bodyline. An OEM or equivalent gasket must be installed.

The vehicle passenger compartment and the listening/measurement compartment shall be one and the same. Driver and passenger's seats must occupy the same air space. Passenger's compartment shall consist of the following boundaries:

- Factory roof line
- Factory windshield position
- Factory fire wall position
- Factory inner door panels.

EXCEPTIONS: Pickup trucks with the rear of the cab and/or front of the bed cut out in order to allow speaker or box placement in the truck bed are allowed in the modified division. In these vehicles the floor of the truck bed may be lowered to the level of the floor of the cab provided such change does not make any portion of the bed lower than the top side of the vehicle frame. All modifications should resemble OEM in appearance and function

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
MODIFIED DIVISION										
MODIFIED 0-7000	2 AMPLIFIERS	BEHIND B PILLAR	7	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	MODIFIED
MODIFIED 7000-14000	4 AMPLIFIERS	BEHIND B PILLAR	13	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	MODIFIED
MODIFIED UNLIMITED	UNLIMITED	BEHIND B PILLAR	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	MODIFIED

XTREME DIVISION

XTREME DIVISION uses the General rules with the following exceptions:

(Many of the following rules and drawings are courtesy of Wayne Harris and DBDRA. USACI would like to thank Mr. Harris for his generosity in allowing us to utilize these guidelines for the cabin measurements.)

A spotter must be present to assist the driver at any time the vehicle is moving

The power source may not produce more than 18.0 volts with the vehicle running.

Competitors will NOT be allowed in any vehicle under test over 165db in the Xtreme division.

Modifications will be allowed to the interior of the passenger compartment. The floor, ceiling and dashboard may be modified. Ceilings may be lowered and floors may be raised.

Modifications to the exterior of the vehicle to accommodate the sound system are allowed

No seats are required.


The factory windshield and side glass may be replaced. There must be at least one 8.5 x 11 inch unobstructed view port directly in front of the steering wheel. There must be two view ports to allow an unobstructed view of the SPL sensor during testing. These view ports must be located on opposite sides of the vehicle and behind the "A" pillar. The microphone/sensor may be placed anywhere forward of the "B" pillar within the following guidelines.

The microphone/sensor may be placed in a foot well or other microphone/sensor specific location only if the location and entrance to said location is below dash level. The location may be no more than 10 inches deep and no less than 13 inches in height and width. If the microphone/sensor is to be placed above dash level, it may only be placed on the windshield, 12 inches from the passenger side "A" pillar, 4 inches from the top of the dash, and one inch from the windshield.


A dash will be required in every competition vehicle.

The highest point of the top of the dash may not extend above the horizontal plane determined by the base of the windshield.


The lowest point of the top of the dash may not be located any lower than 3 inches below the horizontal plane determined by the base of the windshield.

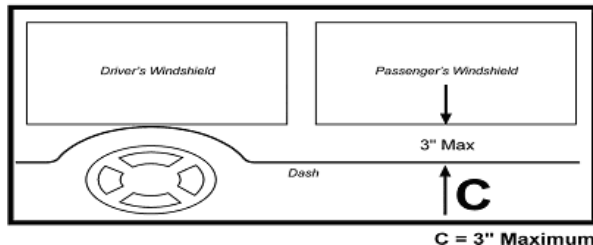

The minimum depth of the dash at the center of the vehicle is 6 inches when measured from the edge of the dash to the windshield. The maximum depth shall be 16 inches

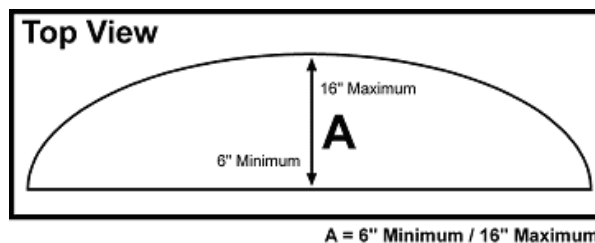

The plane of the dash bounded in the front by the firewall, in the back by the trailing edge of the dash, and for a distance of 12 inches to the left and 12 inches to the right (measured horizontally) of the sensor placement location must be completely flat with respect to the ground.

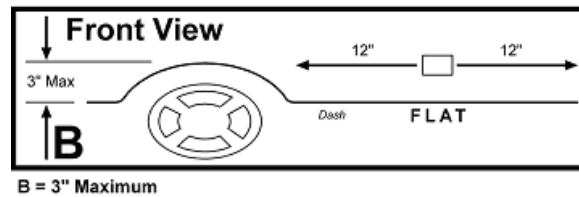

The dash may be completely solid (with no holes or perforations) and must extend front-to-back from the firewall to the trailing edge of the dash, and side-to-side from the windshield pillar on the driver's side to the windshield pillar on the passenger side.

The trailing edge of the dash (the edge of the dash that faces the passenger compartment) must be straight and perpendicular to the centerline of the vehicle when viewed from the top.

The center console may not exceed the height of the lowest part of the top of the dash.

A minimum "open space" distance of 13 inches (33.02 cm) MUST be provided at ALL points between each side of the center console and each door. (Measured horizontally and perpendicular to the centerline of the vehicle.)


Center consoles must not interfere with the "String Test". Competitors may "notch" their consoles or make the console easily removable to comply with this requirement. Notches may be taped shut after the string test.

If no center console is present, then the 13 inches (33.02 cm) closest to each door will be treated as the open space area.

Competitors MAY construct a roof build-down if desired.

Additional Guidelines: The build-down may not extend more than 3 inches (7.62 cm) below the top of the doorjamb.

For those locations in front of the door (between the door and the windshield) and behind the door (between the door and the baffle board), the roof build-down may not extend more than 3 inches (7.62 cm) below the lowest part of the top of the doorjamb. For doors with curved door openings, the reference point shall be defined as the intersection between two imaginary lines.

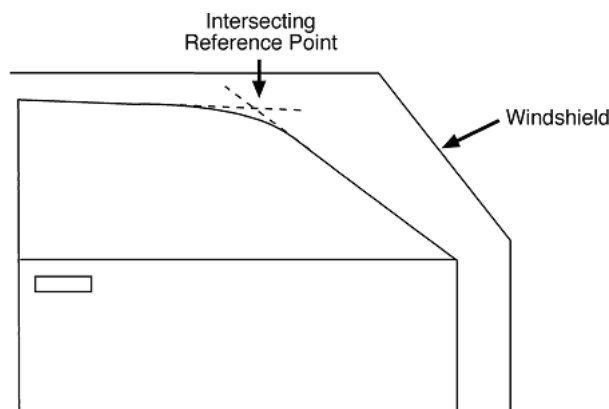


Competitors MAY construct floor build-ups.

Competitors MAY construct a removable or flip-down panel(s) to cover the OEM foot wells.


Additional Guidelines: In the interest of safety, competitors are encouraged not to modify the vehicle's OEM foot pedals (accelerator pedal, brake pedal, clutch, and parking brake).

Competitors MUST maintain a minimum 30-inch (76.2 cm) vertical separation between the headliner (roof build-down) and the floor (floor build-up) at ALL locations within the passenger compartment except over the center console and the dash.


Additional Guidelines: A 30-inch rod will be used to determine compliance. The judge will hold the rod vertically and move it around inside of the passenger compartment. If the rod's movement is impeded, then the vehicle fails compliance with this rule. Bracing located outside of the "open space" area shall not constitute an impediment to this test.

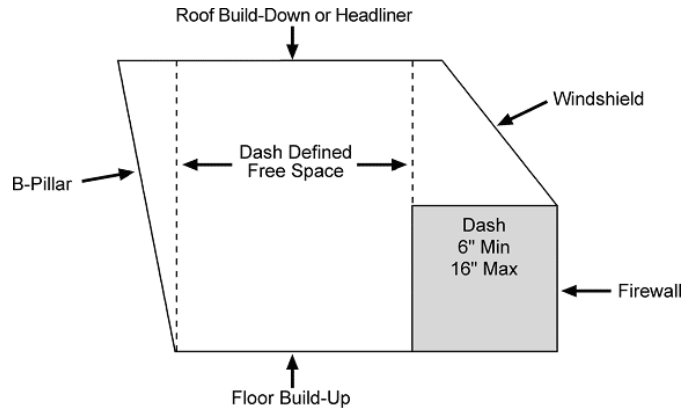

In the above example, the top trailing edge of the dash defines the vertical plane that is used to establish the front-to-back Free Space area. (Note how the dash is NOT located completely beneath the OEM windshield location.) Not to Scale.

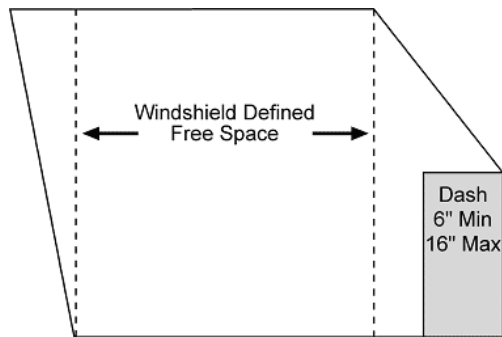

In the above example, the OEM top windshield frame defines the vertical plane that is used to establish the front-to-back Free Space area. (Note how the dash is located completely beneath the OEM windshield location.) Not to Scale.

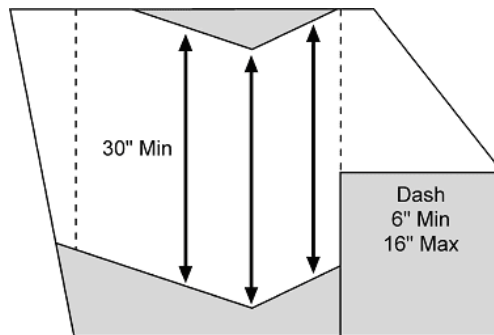

In the above example, the top trailing edge of the dash defines the vertical plane that is used to establish the front-to-back Free Space area. This example also depicts how changes to the roof build-down and floor build-up can be made provided a minimum distance of 30 inches is maintained. Not to Scale.

Competitors MAY build-out their door panels if desired.

Additional Guidelines The maximum distance the build-out may extend into the passenger compartment is 6 inches. (Measured from the sheet metal of the door where the OEM door panel was originally attached.)

Cavities in doors are prohibited. (A cavity is a negative build-out that protrudes into the door's interior space.)

Competitors MAY install bracing if desired.

Additional Guidelines and Examples: The maximum aggregate width for all bracing in front of the B-Pillars is 6 inches. (To determine compliance with this guideline, find the widest point on each of your braces. Next, add these maximum widths together. The total value must be 6 inches or less.)

If the brace "Y's" into 2 or more arms, then the width of the brace shall be considered as either the sum of the widest point on each arm, or the maximum width of the single "leg", whichever is larger.

Example: A competitor is using a single 4" x 4" brace from the roof to the floor. The widest dimension of the brace is 4 inches, so the competitor is in compliance.

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
XTREME DIVISION										
EXTREME	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	XTREME

PORT WARS DIVISION

The competitor may choose to run with or without the globe. **If the globe is not used the mic must go in a USACI approved mic jig.** The sensor may be placed in any location that it will fit into provided the location does not pose a threat to the safety of the microphone/sensor. **Once the microphone/sensor is placed it cannot be touched until the run is over.** The enclosure must be located inside the vehicle and may not obstruct the driver's ability to operate the motor vehicle. The port must exhaust into the interior or the passenger compartment of the vehicle. The opening the microphone is placed in may not be modified after the microphone has been placed. The microphone may not be closer than 4 inches from any opening unless that opening is large enough to fit the microphone inside. The use of tubes, pipes, or other devices to intentionally direct airflow across the microphone/sensor will not be allowed.

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
PORT WARS DIVISION										
PORT WARS	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	TONE	PORT WARS

BASS BATTLES DIVISION

The competitor will choose their own music. The music must be commercially available, copy written, and have no profanity.

Audible highs/midrange music must be able to be heard from outside the vehicle. .

Scores will be determined by an average SPL taken over 1 MINUTE.

The Sensor placement will be any place in front of the "B" pillar with globe affixed or mounted to windshield without globe at 12" to the left of passenger's side "A" pillar and 4" above the dash. (Competitor's choice).

All exterior door skins and all windows must remain OEM.

Front seats must be in place.

The Dashboard must be OEM but maybe be modified to accommodate the sound system and appearance.

Modifications to the floor in front of the "B" pillar (build ups, cutting of metal) are NOT allowed

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
BASS BATTLES DIVISION										
NO WALL	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	1 MIN. MUSIC AVERAGE	XTREME
WALL	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	1 MIN. MUSIC AVERAGE	XTREME

STREET BEAT DIVISION

(REFERENCE THE CONE AREA CHART IN THIS RULEBOOK TO DETERMINE SUBWOOFER CONE AREA)

All Street Beat competitors will be required to use the official USACI Street Beat software for this division.

Scores will be determined by an average SPL taken over 30 SECONDS.

The Sensor placement will be any place in front of the "B" pillar with globe affixed or mounted to windshield without globe at 12" to the left of passenger's side "A" pillar and 4" above the dash. (Competitor's choice)

A competitor may compete in multiple classes within the Street Beat division provided his/her vehicle meets the qualifications for that class.

All exterior door skins and all windows must remain OEM.

Front seats must be in place.

The Dashboard must be OEM but maybe be modified to accommodate the sound system and appearance.

Modifications to the floor in front of the "B" pillar (build ups, cutting of metal) are NOT allowed

POWER CLASS	AMPLIFIER QUANTITY	ALLOWED INTERIOR MODIFICATIONS	BATTERY QUANTITY	ALLOWED SUPER CAPACITORS	ALTERNATOR QUANTITY	MAX VOLTS	CLAMPED POWER	CONE AREA LIMIT	MUSIC AVERAGE/TONE	RULES
STREET BEAT DIVISION										
STREET BEAT 1	UNLIMITED	NONE	4	NO	1+STOCK	15.5V	NO	255 SQ. IN. MAX	30 SEC. MUSIC AVERAGE	STOCK
STREET BEAT 2	UNLIMITED	BEHIND B PILLAR	7	YES	1+STOCK	15.5V	NO	525 SQ. IN. MAX	30 SEC. MUSIC AVERAGE	MODIFIED
STREET BEAT 3	UNLIMITED	BEHIND B PILLAR	UNLIMITED	YES	UNLIMITED	18V	NO	775 SQ. IN. MAX	30 SEC. MUSIC AVERAGE	MODIFIED
STREET BEAT 4	UNLIMITED	UNLIMITED	UNLIMITED	YES	UNLIMITED	18V	NO	UNLIMITED	30 SEC. MUSIC AVERAGE	XTREME

Subwoofer Cone Area (Round)								
Woofers Size	6.5	8	10	12	13	15	18	21
Woofers Quantity	TOTAL SQUARE INCHES							
1	33.17	50.24	78.50	113.04	132.67	176.63	254.34	346.19
2	66.33	100.48	157.00	226.08	265.33	353.25	508.68	692.37
3	99.50	150.72	235.50	339.12	398.00	529.88	763.02	1,038.56
4	132.67	200.96	314.00	452.16	530.66	706.50	1,017.36	1,384.74
5	165.83	251.20	392.50	565.20	663.33	883.13	1,271.70	1,730.93
6	199.00	301.44	471.00	678.24	795.99	1,059.75	1,526.04	2,077.11
7	232.16	351.68	549.50	791.28	928.66	1,236.38	1,780.38	2,423.30
8	265.33	401.92	628.00	904.32	1,061.32	1,413.00	2,034.72	2,769.48
9	298.50	452.16	706.50	1,017.36	1,193.99	1,589.63	2,289.06	3,115.67
10	331.66	502.40	785.00	1,130.40	1,326.65	1,766.25	2,543.40	3,461.85
11	364.83	552.64	863.50	1,243.44	1,459.32	1,942.88	2,797.74	3,808.04
12	398.00	602.88	942.00	1,356.48	1,591.98	2,119.50	3,052.08	4,154.22
13	431.16	653.12	1,020.50	1,469.52	1,724.65	2,296.13	3,306.42	4,500.41
14	464.33	703.36	1,099.00	1,582.56	1,857.31	2,472.75	3,560.76	4,846.59
15	497.49	753.60	1,177.50	1,695.60	1,989.98	2,649.38	3,815.10	5,192.78
16	530.66	803.84	1,256.00	1,808.64	2,122.64	2,826.00	4,069.44	5,538.96
17	563.83	854.08	1,334.50	1,921.68	2,255.31	3,002.63	4,323.78	5,885.15
18	596.99	904.32	1,413.00	2,034.72	2,387.97	3,179.25	4,578.12	6,231.33

Subwoofer Cone Area (Square)					
Woofers Size	8	10	12	15	18
Woofers Quantity	TOTAL SQUARE INCHES				
1	64.00	100.00	144.00	225.00	324.00
2	128.00	200.00	288.00	450.00	648.00
3	192.00	300.00	432.00	675.00	972.00
4	256.00	400.00	576.00	900.00	1,296.00
5	320.00	500.00	720.00	1,125.00	1,620.00
6	384.00	600.00	864.00	1,350.00	1,944.00
7	448.00	700.00	1,008.00	1,575.00	2,268.00
8	512.00	800.00	1,152.00	1,800.00	2,592.00
9	576.00	900.00	1,296.00	2,025.00	2,916.00
10	640.00	1,000.00	1,440.00	2,250.00	3,240.00
11	704.00	1,100.00	1,584.00	2,475.00	3,564.00
12	768.00	1,200.00	1,728.00	2,700.00	3,888.00